


Frame areas that come in contact with concrete shall be coated with bituminous paint

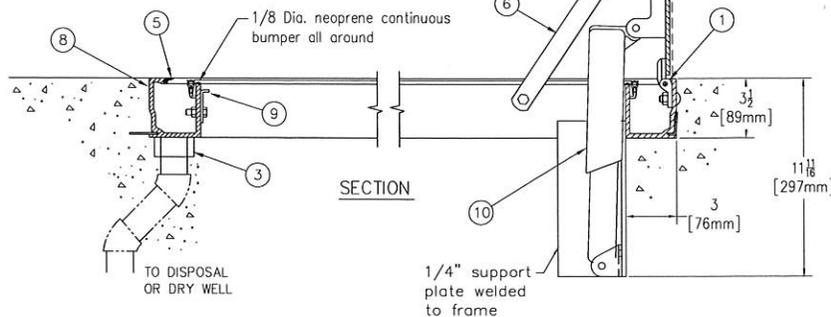

NOTE:
THIS DOOR SHALL EXHIBIT AN AIR INFILTRATION RATE OF LESS THAN 1 CFM (1.69 m³/hr) PER LINEAL FOOT OF COVER PERIMETER WHILE UNDER A PRESSURE DIFFERENTIAL, ACROSS THE COVER, OF 1\"/>

THIS DRAWING IS THE PROPERTY OF THE BILCO COMPANY AND INCORPORATES INFORMATION WHICH IS PROPRIETARY. PUBLICATION AND/OR PUBLIC DISTRIBUTION IN WHOLE OR IN PART IS EXPRESSLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF THE BILCO COMPANY. THE INFORMATION CONTAINED HEREIN REMAINS THE PROPERTY OF THE BILCO COMPANY. ALL RIGHTS RESERVED.

SPECIFICATIONS

1. Bilco heavy duty forged aluminum hinges with stainless steel pins
2. Guide arm (if req'd)
3. 1-1/2" drain coupling
4. Standard slam lock
5. Continuous EPDM debris gasket
6. Bilco automatic hold open arm w/ red vinyl grip
7. 1/4" aluminum diamond pattern plate cover
8. Bilco 1/4" aluminum channel frame with recessed anchors
9. Stainless steel lock strike
10. Lifting mechanism with reinforced composite tubes and electrocoated compression springs

SHOP FINISH:
ALUMINUM: MILL FINISH
HARDWARE: CORROSION RESISTANT
(unless otherwise specified)

REINFORCED FOR 300 Lbs. PER Sq. Ft.
(1464 kg. PER Sq. METER) LIVE LOAD

INSTALLER NOTES:

- A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.
- B. Be sure unit is set on slight pitch toward drain corner.
- C. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.
- D. Do not reduce 1 1/2" drain pipe to dry well or disposal system.
- E. Bend down anchors if required

Customer: City of Wenatchee

P.O. N°

Job: Wenatchee WWTP Improvements

Sales Rep: Eric Peterson
Anderson Specialties

Manufacturers of Doors for Special Services
Bilco[®] THE BILCO COMPANY
New Haven, Connecticut 06505

SINGLE LEAF ACCESS DOOR TYPE J-AL-R - ODOR CONTROL

QTY	TYPE	SIZE WIDTH x LENGTH
1	J-AL-R	3'-0" x 3'-0" HINGE SIDE

FOR SIZE LIMITATIONS ON THIS UNIT, CONSULT FACTORY

WARRANTY REGISTRATION



Since 1926

January 17, 2014

APOLLO INC
P O BOX 7305
KENEWICK, WA 99336

Bilco Sales Order #: 545979
Bilco Invoice #: 841915
Invoice Date: 2012-09-21
Customer Purchase Order #: P135-0015
Project: WENATCHEE WWTP - DOC: 2012-10-24
Item: J-AL-R
Serial #: 60008115

Your Assurance of Quality

Floor, Vault, and Sidewalk Doors

(Type J-AL, J-AL H20 only)

Every Bilco product is designed to operate to the customer's satisfaction and to provide years of trouble-free service. Should a part fail to function in normal use within a period of twenty-five (25) years from the date of purchase, a new part will be furnished at no charge.

Electric motors, special finishes, and other special equipment (if applicable) shall be warranted separately by the manufacturers of those products.







The Bilco Company, The World Leader in the Manufacture of
Roof Hatches • Fire Vents • Floor, Vault & Sidewalk Doors • Basement Doors • ScapeWEL® Window Wells

P.O. Box 1203, New Haven
Connecticut, U.S.A. 06505

Phone: (203) 934-8363 FAX: (203) 933-8478
Internet: www.bilco.com e-mail: bilco@bilco.com

37 Water Street, West Haven,
Connecticut, U.S.A. 06516

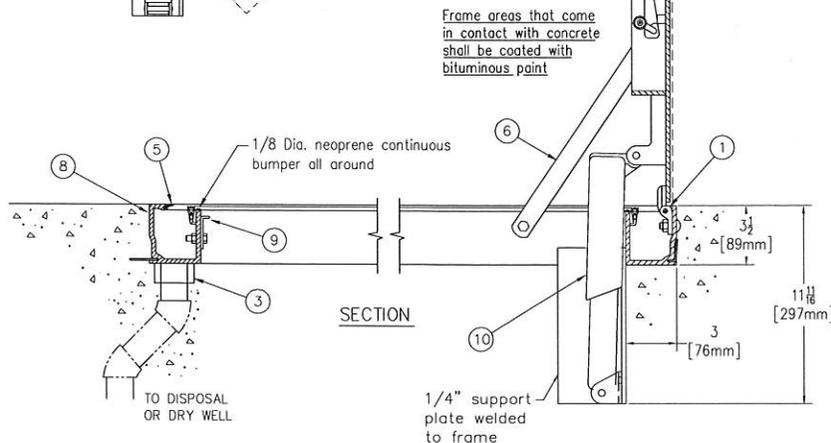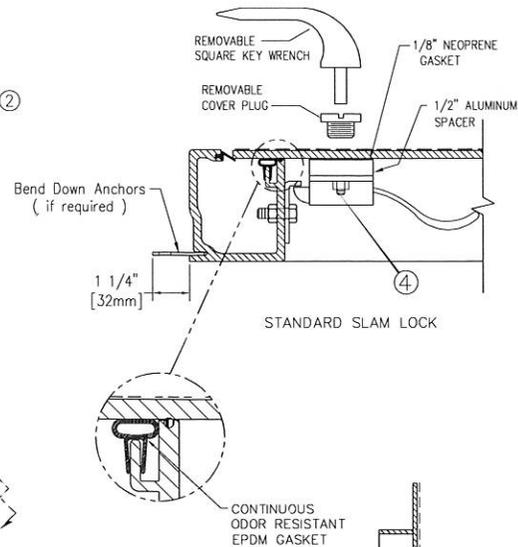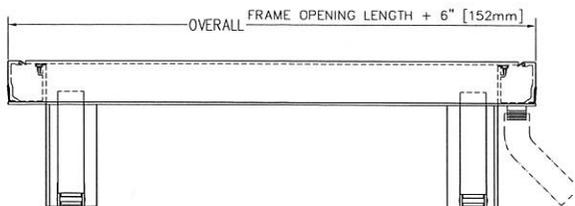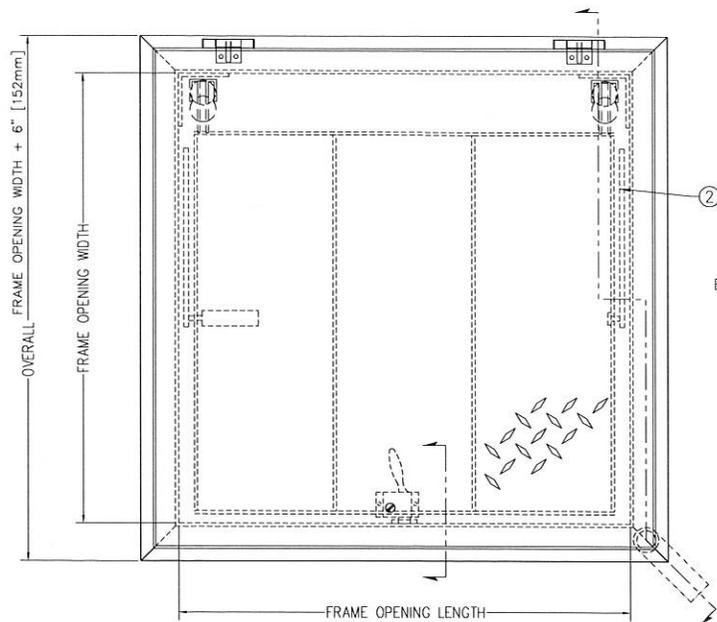

NOTE:
THIS DOOR SHALL EXHIBIT AN AIR INFILTRATION RATE OF LESS THAN 1 CFM (1.69 m³/hr) PER LINEAL FOOT OF COVER PERIMETER WHILE UNDER A PRESSURE DIFFERENTIAL, ACROSS THE COVER, OF 1" [25.4 mm] WATER COLUMN.

THIS DRAWING IS THE PROPERTY OF THE BILCO COMPANY AND INCORPORATES INFORMATION WHICH IS PROPRIETARY. PUBLICATION AND/OR PUBLIC DISTRIBUTION IN WHOLE OR IN PART IS EXPRESSLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF THE BILCO COMPANY. THE INFORMATION CONTAINED HEREIN REMAINS THE PROPERTY OF THE BILCO COMPANY. ALL RIGHTS RESERVED.

SPECIFICATIONS

1. Bilco heavy duty forged aluminum hinges with stainless steel pins
2. Guide arm (if req'd)
3. 1-1/2" drain coupling
4. Standard slam lock
5. Continuous EPDM debris gasket
6. Bilco automatic hold open arm w/ red vinyl grip
7. 1/4" aluminum diamond pattern plate cover
8. Bilco 1/4" aluminum channel frame with recessed anchors
9. Stainless steel lock strike
10. Lifting mechanism with reinforced composite tubes and electrocoated compression springs

SHOP FINISH:
ALUMINUM: MILL FINISH
HARDWARE: CORROSION RESISTANT
(unless otherwise specified)

REINFORCED FOR 300 Lbs. PER Sq. Ft.
(1464 kg. PER Sq. METER) LIVE LOAD

INSTALLER NOTES:

- A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.
- B. Be sure unit is set on slight pitch toward drain corner.
- C. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.
- D. Do not reduce 1 1/2" drain pipe to dry well or disposal system.
- E. Bend down anchors if required

Customer: City of Wenatchee

P.O. N°

Job: Wenatchee WWTP Improvements

Sales Rep: Eric Peterson
Anderson Specialties

Manufacturers of Doors for Special Services
Bilco[®] THE BILCO COMPANY
New Haven, Connecticut 06505

SINGLE LEAF ACCESS DOOR TYPE J-AL-R - ODOR CONTROL

QTY	TYPE	SIZE WIDTH x LENGTH
1	J-AL-R	3'-0" x 6'-0" HINGE SIDE

FOR SIZE LIMITATIONS ON THIS UNIT, CONSULT FACTORY

WARRANTY REGISTRATION



Since 1926

January 17, 2014

APOLLO INC
P O BOX 7305
KENEWICK, WA 99336

Bilco Sales Order #: 545979
Bilco Invoice #: 841915
Invoice Date: 2012-09-21
Customer Purchase Order #: P135-0015
Project: WENATCHEE WWTP - DOC: 2012-10-24
Item: J-AL-R
Serial #: 60009707


Your Assurance of Quality

Floor, Vault, and Sidewalk Doors

(Type J-AL, J-AL H20 only)

Every Bilco product is designed to operate to the customer's satisfaction and to provide years of trouble-free service. Should a part fail to function in normal use within a period of twenty-five (25) years from the date of purchase, a new part will be furnished at no charge.

Electric motors, special finishes, and other special equipment (if applicable) shall be warranted separately by the manufacturers of those products.



The Bilco Company. The World Leader in the Manufacture of
Roof Hatches • Fire Vents • Floor, Vault & Sidewalk Doors • Basement Doors • ScapeWEL • Window Wells

P.O. Box 1203, New Haven
Connecticut, U.S.A. 06505

Phone: (203) 934-6363 FAX: (203) 933-8478
Internet: www.bilco.com e-mail: bilco@bilco.com

37 Water Street, West Haven,
Connecticut, U.S.A. 06516



Operation/Maintenance Notes

BILCO TYPE J-AL (ALUMINUM) ACCESS DOOR

OPERATION

TO OPEN:

Remove the lock access plug, with the slotted end of the key wrench, from the active leaf. Insert the square end of the key wrench thru the hole and turn the handle to release the snap lock. Pull up on the flush grip handle until the cover is in the full 90 degree and locked position.

TO CLOSE:

Close the door leaf first by pulling the red vinyl grip handle to release the positive locking hold open arm. Lower the cover until it is in its closed position. Replace the removable cover

plug.

MAINTENANCE

This unit is supplied in mill finish aluminum. No finish painting is required.

The channel frame, drain coupling and drip channel must be kept clear of dirt and debris at all times to maintain proper water drainage.

Occasional oiling of the hinges and lock will assure smooth, trouble-free operation.